

# Infrared Laser Diode

ADL-80V03TL

6-2D-LD80-010\_Rev.01

## 808nm 0.5W High Power Operation

### Features

Highly reliable  
Higher power


### Applications

Pumping of solid-state lasers and fiber lasers  
Industrial, measuring, scientific and medical systems  
Applications in the printing industry  
Defense and security

### Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	0.55	W
Reverse voltage (LD)	$V_{RL}$	-	2	V
Case temperature	$T_C$	-	-10~+50	°C
Storage temperature	$T_S$	-	-40~+85	°C

Unit: mm

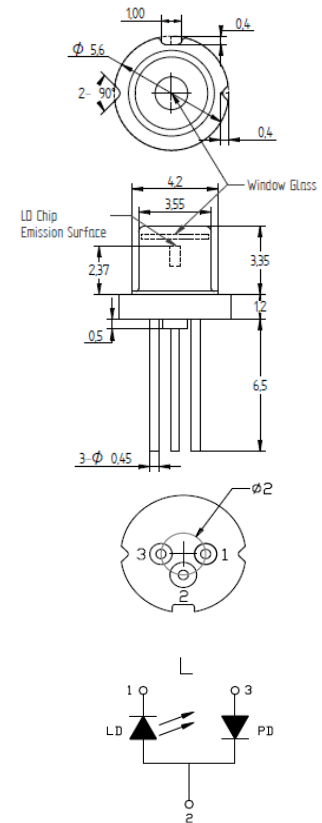

### Electrical and optical characteristics ( $T_c=25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	798	808	818	nm	$P_O=0.5W$
Threshold current	$I_{th}$	-	320	450	mA	
Operating current	$I_{op}$	-	800	1000	mA	
Operating voltage	$V_{op}$	-	1.9	2.5	V	
Differential efficiency	$\eta$	0.7	1.1	1.4	mW/mA	$P_O=0.4\text{--}0.5W$
Monitor current	$I_m$	0.5	-	3	mA	$P_O=0.5W$
Parallel divergence angle	$\theta_{//}$	-	7	12	deg.	
Perpendicular divergence angle	$\theta_{\perp}$	30	35	40	deg.	

\* Sufficient heat dissipation is required for CW operation.

### ● Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

### ARIMA LASERS CORP.

PHONE: 886-3-4699800 | FAX: 886-3-4699600

E-MAIL: Ldsales@arimalasers.com | www.arimalasers.com

For reference only. Contents above are subject to change without notice.

**Arima**  
LASERS

## 808nm 0.5W High Power Operation

Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

