

Water Cooled QCW Side Pumped Module

SP18 Series




Features

- High peak power & High Gain
- Long lifetime
- High Fluorescence Uniformity
- High stability
- Compact Size

Applications

- Pumping
- Medical
- Industry
- Research

Product Dimensions (mm)

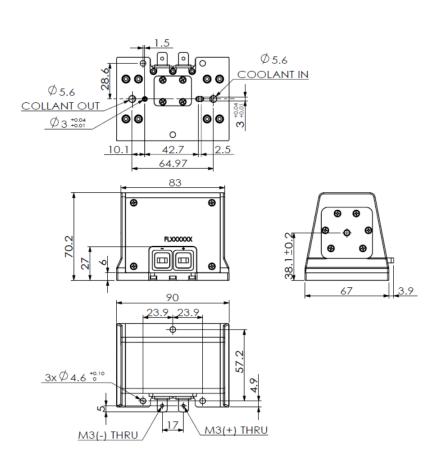



Remark: The structure drawing is for reference only. Please feel free to contact us for any special requirements.

All rights reserved. Product specifications and descriptions are subject to change. Product delivered with limited warranty. Please contact our sales representatives for complete details. Address: 56 Zhangba 6th Road, High-Tech Zone, 710077 Xi'an, Shaanxi, P. R. China Focuslight Technologies Inc. Tel: +86 29 8188 9945 | Email: sales@focuslight.com | Website: https://www.focuslight.com



Product Specifications

Product Code		(Typical Customization)
Part No.		FL-SP18-25-5000-808(Q)
General Data	Unit	Value
Number of Bars		25
Rod Type		Nd:YAG, 1% doped
Rod Diameter	mm	4
Rod Length	mm	83
Product size (length x width x height)	mm	90 x 67 x 70.2
Product weight	Kg	1.15
Optical Data		
Operation Type		QCW
Peak Power per Bar	W	≤200
Pumping Wavelength	nm	808±2
Pumping Length	mm	50
Output Power ¹	W	>90@1064nm
Stored energy	J	>0.28@1064nm
Small Signal Gain (Amplification Factor)	-	>30@1064nm
Electrical Data		
Operating Current	А	≤200
Operating Voltage	V	≤50
Pulse Duration	μs	≤240
Repetition Rate	Hz	200
Thermal Data		
Operating Temperature	°C	25
Water Pressure	MPa	≤0.5
Water Flow	L/min	≥9
Storage Temperature ²	°C	-55 ~ 85

¹Output power in a short flat-flat cavity, cavity length:300mm±5mm, output coupler: 50%.

²Non-condensing environment is required for storage and operation below ambient dew point.



Rev 01 | Updated September 26, 2022